

STEREO VIDEOMIC

X/Y Stereo Directional Video Condenser Microphone

RØDE[®]
MICROPHONES

Features


- Stereo X/Y Condenser Microphone
- Broadcast sound quality
- 9V battery powered
- Integrated shock mounting
- Two step High Pass Filter (Flat/80Hz)
- Rugged cast aluminium body
- Low noise circuitry
- Custom designed integrated windshield
- 3.5mm mini-jack output
- Integrated cold-shoe mount, 1/4" and 3/8" thread
- Designed and manufactured in Australia
- Full 10 year warranty*




Specifications

Acoustic Principle	Pressure Gradient	Directional Pattern	Super-Cardioid
Frequency Range	40Hz ~ 20,000Hz (selectable HPF@80Hz)	Sensitivity	-38dB ±2dB re 1V/Pa @ 1kHz
Nominal Impedance	200Ω	Equivalent Noise	20dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1kΩ)	Dynamic Range	115dB (per IEC651)
Maximum SPL	134dB (@ 1kHz, 1% THD into 1kΩ load)	Signal/Noise	74dB SPL (A - weighted per IEC651)
Power Req.	9V alkaline battery (Current 7mA)	Dimensions	170mmL x 102mmH x 65mmD
Output Connection	3.5mm stereo mini-jack	Net Weight	176g

Frequency Response

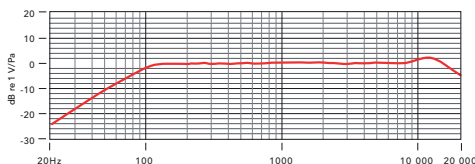

Polar Pattern



Included Accessories

- DeadKitten windscreen



Available from
**Quadrant Digital Solutions, Unit 1 Hawthorn Road
Castle Donington, Derby, DE74 2QR**
Sales: 0870 084 1166, Fax: 01332 817778
information@quadrantdigital.co.uk

Quadrant
DIGITAL SOLUTIONS

www.rodemic.com

*After online registration